

High build epoxy reinstatement mortar

Uses

For the fast and permanent reinstatement of concrete, particularly where resistance to chemicals is required. Nitomortar HB can be used for small, localised patch repairs and, because of its lightweight nature, is ideally suited for use in vertical and overhead locations, and for emergency repairs where fast strength gain is important. When properly compacted, the mortar is highly impermeable.

For fast repairs to floors and other locations subjected to wear and abrasion, the use of Nitomortar S is recommended.

Advantages


- Lightweight formulation enabling high build, thereby saving time and expense
- Obviates the need for formwork
- Early development of strength minimises disruption
- Highly resistant — unaffected by a wide range of chemicals
- Extremely low permeability
- Equal to the strength of high quality concrete within 3 days
- Pre-weighed components ensure consistency

Description

Nitomortar HB is based on a high performance solvent-free epoxy resin system. The special lightweight filler is specifically designed to give excellent 'hanging' properties for vertical and overhead work. Nitomortar HB is a three-component material supplied in pre-weighed quantities ready for on-site mixing and use.

Specification Clause

The repair mortar shall be Nitomortar HB a three-component solvent-free epoxy resin based mortar that conforms to BS EN 1504 Part 3 for application thicknesses up to 30mm per layer to vertical and overhead surfaces. The homogeneously mixed mortar shall be able to achieve a fully cured compressive strength of 40 N/mm². It shall be mixed and applied to a correctly prepared and primed substrate in accordance with the manufacturer's written instructions.

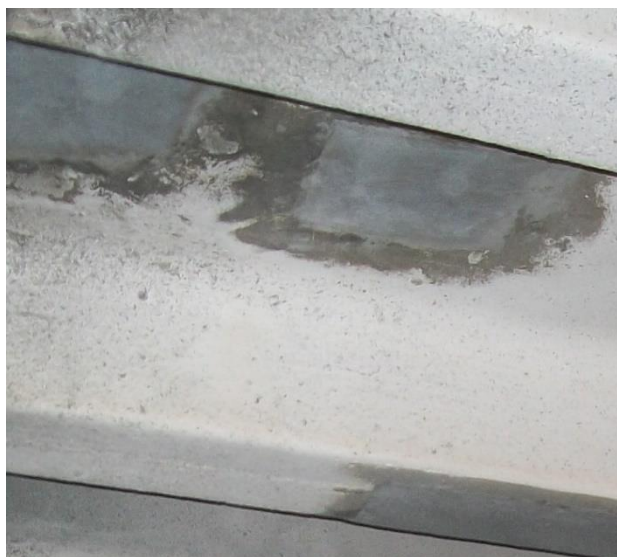

CE 0370 09 0370-CPR-0845	UK CA 0836 22 UK 0836-CPR-22/F6049
DOP: UK9-90	
Fosroc International Limited Drayton Manor Business Park, Coleshill Road, Tamworth, B78 3XN, UK	
Fosroc® Nitomortar HB	
EN1504-3: Structural and non-structural repair methods 3.1, 7.1 and 7.2	
Compressive strength	≥ 15 MPa
Chloride ion content	≤ 0.05%
Adhesion strength by pull-off test	≥ 0.08 MPa
Thermal compatibility: freeze-thaw cycling with immersion	≥ 0.08 MPa
Carbonation resistance	dk ≤ control concrete
Capillary absorption (water permeability)	≤ 0.5kg/(m ² .h ^{0.5})
Fire classification	<u>C s1 d0</u>
Stiffening time	Declared value
Determination of workability	Declared value

Fosroc® Nitomortar HB

Properties

The following results were obtained at a temperature of 20°C unless otherwise specified.

Test method	Typical result
Compressive strength (EN12190:1999):	40 N/mm ² @ 7 days
Flexural strength (BS 6319, Pt 3):	15 N/mm ² @ 7 days
Tensile strength (BS 6319, Pt 7):	7 N/mm ² @ 7 days
Compressive modulus (ASTM C 469-65):	4.5 kN/mm ² @ 7 days
Pot life:	45 minutes @ 20°C 20 minutes @ 35°C
Initial hardness:	24 hours
Full cure:	7 days
Fresh wet density:	Approx. 1160 kg/m ³ (fully compacted)

Chemical resistance:

Performance of Nitomortar HB blocks continually immersed at 20°C:

Citric acid	10%	Excellent
Tartaric acid	10%	Excellent
Hydrochloric acid	25%	Excellent
Sodium hydroxide	50%	Excellent
Diesel fuel/petrol	100%	Excellent
Sulphuric acid	10%	Very good
Sugar solutions	Saturated	Very good
Lactic acid	10%	Very good
Hydrocarbons	100%	Very good
Phosphoric acid	10%	Very good
Nitric acid	10%	Good
Acetic acid	5%	Limited

Application instructions

Preparation

Clean the surface and remove any dust, unsound material, plaster, oil, paint, grease, corrosion deposits or algae. Roughen the surface and remove any laitance by light scabbling or grit-blasting. Saw cut or cut back the extremities of the repair locations to a depth of at least 10 mm to avoid feather-edging and to provide a square edge. Break out the complete repair area to a minimum depth of 10 mm up to the sawn edge.

Oil and grease deposits should be removed by steam cleaning, detergent scrubbing or the use of a proprietary degreaser. The effectiveness of decontamination should then be assessed by a pull-off test.

Expose fully any corroded steel in the repair area and remove all loose scale and corrosion deposits. Steel should be cleaned to a bright condition paying particular attention to the back of exposed steel bars. Grit-blasting is recommended for this process.

Reinforcing steel priming

The cleaned steel should be coated within 3 hours. Apply one full coat of Nitoprime Zincrich Plus and allow to dry before continuing. If any doubt exists about having achieved an unbroken coating, a second application should be made and, again, allowed to dry before continuing.

Substrate priming

The dry substrate should be primed using Nitoprime 28. The primer should be mixed in the proportions supplied, adding the entire contents of the hardener tin to the 'base' tin. The two components should be thoroughly mixed together for 3 minutes.

The mixed primer should be scrubbed well into the prepared substrate, taking care that all imperfections in the surface are properly coated and avoiding 'puddling' in depressions. If the Nitoprime 28 is absorbed within 30 minutes, a second coat should be applied before continuing.

Nitomortar HB can be applied as soon as the primer has started to gel but still has surface 'tack'. This is normally between 30 minutes and 4 hours dependent on the ambient and substrate temperatures. If Nitoprime 28 cures hard, a second application must be made before application of Nitomortar HB.

The usable life of the mixed primer is approximately 60 minutes at 20°C or 30 minutes at 35°C.

Mixing

Care should be taken to ensure that Nitomortar HB is thoroughly mixed to produce a fully homogeneous, trowellable mortar.

Nitomortar HB must be mixed mechanically. The 'hardener' and 'base' components should be stirred thoroughly in order to disperse any settlement before mixing them together. The entire contents of the 'hardener' container should then be emptied into the 'base' container and thoroughly mixed for 3 minutes, then emptied into a forced action mixer of adequate capacity (e.g. Creteangle). Add the aggregate slowly with the mixer running and continue for 2 to 3 minutes until all the components are thoroughly blended. Under no circumstances should part packs be used.

Application

Apply the mixed Nitomortar HB to the prepared substrate by wood float, pressing firmly into place to ensure positive



Fosroc® Nitomortar HB

adhesion and full compaction. Thoroughly compact the mortar around any exposed reinforcement. In restricted locations, or where exposed reinforcing steel is present, application by gloved hands is an acceptable alternative but, in all cases, the product must be finished to a tight surface with a steel trowel. Nitomortar HB can be applied in sections up to 30 mm thickness in vertical locations or overhead locations in a single application and without the use of formwork. Thicker sections should be built up in layers but are sometimes possible for smaller repairs, generally up to 50mm, in a single application dependent on the actual configuration of the repair area and the volume of exposed reinforcing steel.

When larger areas are being rendered (generally over 2 m²) a chequerboard application technique is recommended.

Note: the minimum applied thickness of Nitomortar HB is 10 mm.

Build-up

Additional build-up can be achieved by application of multiple layers. Exposed steel reinforcing bars should be firmly secured to avoid movement during the application process as this will affect mortar compaction, build and bond.

Where thicker sections are required, the surface of the intermediate applications should be scratch-keyed to provide a suitable surface for subsequent layers. The application of additional layers should follow between 8 and 24 hours (@ 20°C) after the first application. This time should be reduced at higher temperatures. Repriming with Nitoprime 28 and a further application of Nitomortar HB may then proceed.

If sagging occurs during application, the Nitomortar HB should be completely removed and reapplied at a reduced thickness on to the correctly reprimed substrate.

Finishing

Nitomortar HB is finished by the use of a wood float and closed with a steel trowel wiped with a cloth dampened with Fosroc Solvent 102. The completed surface should not be overworked.

Low temperature working

Nitoprime 28 and Nitomortar HB can be applied in cold conditions down to 5°C. The materials should not be applied when the substrate and/or air temperature is 5°C and falling. At 5°C static temperature or at 5°C and rising, the application may proceed.

Note: cure time and strength gain rate will be increased at low temperatures.

High temperature working

At ambient temperatures above 35°C, Nitoprime 28 and Nitomortar HB will have shorter pot lives and working lives.

The materials should be stored in the shade or in an air-conditioned environment and should not be applied in direct sunlight.

Curing

Unlike cementitious materials Nitomortar HB does not require curing immediately after finishing, but does require protection from rain and wet conditions during the initial 24 hours after placement.

Overcoating with protective/decorative finishes

Nitomortar HB is extremely durable and resistant to a wide range of acids, alkalis and industrial chemicals and will provide excellent protection to the concrete and embedded steel reinforcement within the repaired locations. The surrounding parts of the structure may benefit from the application of a protective coating, thus bringing them up to the same protective standard as the repair itself. Fosroc recommend the use of the Nitocote range of epoxy resin, chemical-resistant, protective coatings.

For surrounding areas not subjected to chemical attack or physical wear, Fosroc recommend the use of the Dekguard range of anti-carbonation, anti-chloride protective coatings. These products provide a decorative and uniform appearance as well as protecting areas of the structure which might otherwise be at risk from the environment.

Nitocote epoxy resin protective coatings should be applied within 24 hours. Dekguard products should not be applied until the Nitomortar HB is at least 3 days old. For further advice, consult the local Fosroc office.

Cleaning

Nitoprime Zincrich Plus, Nitoprime 28 and Nitomortar HB should be removed from tools, equipment and mixers with Fosroc Solvent 102 immediately after use.

Estimating

Supply

Nitomortar HB:	9.3 kg pack
Nitoprime Zincrich Plus:	1.9litre and 800ml cans
Nitoprime 28:	0.45 kg 'Handy' packs
Fosroc Solvent 102:	5 and 25 litre tins

Coverage and yield

Nitomortar HB:	8.0 litres / 9.3 kg pack
Nitoprime Zincrich Plus:	8 m ² /litre
Nitoprime 28:	2.4 m ² / 0.45 kg pack

Notes: the coverage figures for Nitoprime Zincrich Plus and Nitoprime 28 are theoretical — due to wastage factors and the variety and nature of possible substrates, practical coverage figures will be reduced.



Fosroc® Nitomortar HB

Limitations

Nitomortar HB should not be used when the temperature is below 5°C and falling. Do not mix part packs under any circumstances. Due to the lightweight nature of Nitomortar HB, the product should not be used in areas subjected to traffic, point loading or abrasion. Neither should it be exposed to moving water during application. Exposure to heavy rainfall prior to the final set will result in surface softening and scour. Nitoprime 28 is not a damp tolerant primer. If any doubts arise concerning temperature or substrate conditions, consult the local Fosroc office.

Storage

Store in dry conditions in the original, unopened packaging. All products have a shelf life of 24 months at 20°C if kept these conditions. If stored at high temperatures, the shelf life may be reduced to 4 to 6 months.

Precautions

Health and safety

For further information see appropriate Product Safety Data Sheet.

Fire

Nitomortar HB is non-flammable.

Nitoprime Zincrich Plus, Nitoprime 28 and Fosroc Solvent 102 are flammable. Keep away from sources of ignition. No smoking. In the event of fire, extinguish with CO₂ or foam. Do not use a water jet.

Flash points

Nitoprime Zincrich Plus:	41°C
Fosroc Solvent 102:	33°C
Nitoprime 28	27°C

Fosroc and Nitoflor are the trademarks of Fosroc International Limited



Important note

Fosroc products are guaranteed against defective materials and manufacture and are sold subject to its standard Conditions for the Supply of Goods and Services, copies of which may be obtained on request. Whilst Fosroc endeavours to ensure that any advice, recommendation, specification of information it may give is accurate and correct, it cannot, because it has no direct or continuous control over where or how its products are applied, accept any liability either directly or indirectly arising from the use of its products, whether or not in accordance with any advice, specification, recommendation of information given by basis. All Fosroc datasheets are updated on a regular basis. It is the user's responsibility to obtain the latest version.

Fosroc International Limited

Drayton Manor Business Park

Coleshill Road, Tamworth,
Staffordshire B78 3XN. UK

www.fosroc.com

telephone:
+44 (0) 1827 262222

fax:
+44 (0) 1827 262444

email:
enquiryuk@fosroc.com

